

Security System Operation Manual

Paradox alarm panel with TM50/70 Touch screen alarm Keypads interface


Main Home Page:

1. Arm/Disarm- use to select the arming mode:
Arm – for Full house Arm mode
Stay – for Night mode alarm
2. Panic – press to trigger immediate alarm
3. Zone - Provide list of all Zones in the house and their status
4. Info - inform of issues and alerts in the system
5. Menu - additional programming and selection for the system such as user codes



Arm/Disarm Page

1. select the arming mode:
Arm – for Full house Arm mode
Stay – for Night mode alarm
2. Type in the alarm Code for the system to arm
3. The system will start the exit Delay timer to allow safe exit from the house

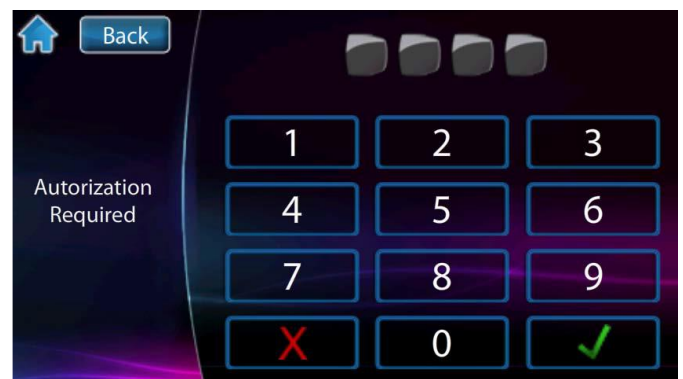


Operation Manual

Menu Option Page:

For menu options press the Menu button and follow the on-screen prompts.


Menu options include:

- Security Functions
- User Codes
- Control Devices
- Add-on
- System Settings
- Personalize
- Advanced

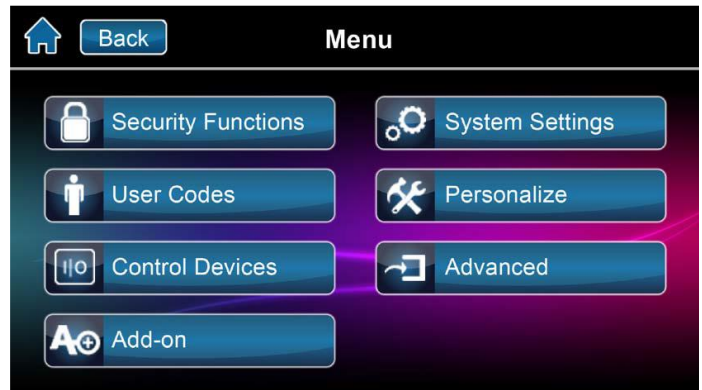

Programming a New User


1. Press the Add button to add a user.
2. Modify Label or press Skip.
3. Enter new user code and press Next.
4. Confirm user code by entering a 2nd time then press Next.
5. Option to learn remote in, press button on remote or press Skip.
6. Enter access card number or press Skip.
7. User Settings (here you can copy the permission settings from an existing user) or press Done.
8. User is now valid.

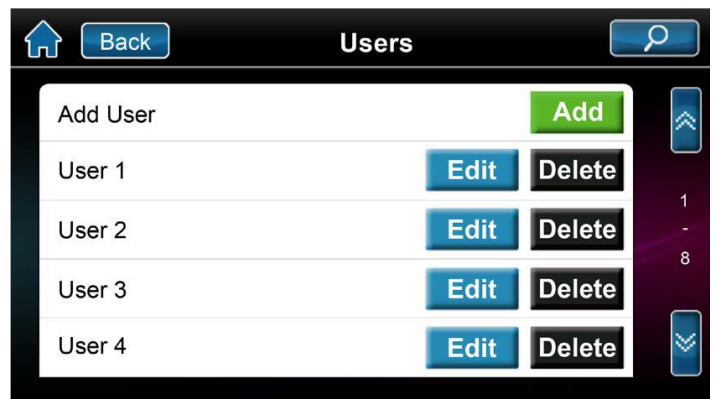

Screen and System Setting

Setting screen accessed through Menu then 'System Settings'. Settings include:

- Time & Date
- Display Setting
- Clean Screen
- Volume/Mute
- Permissions

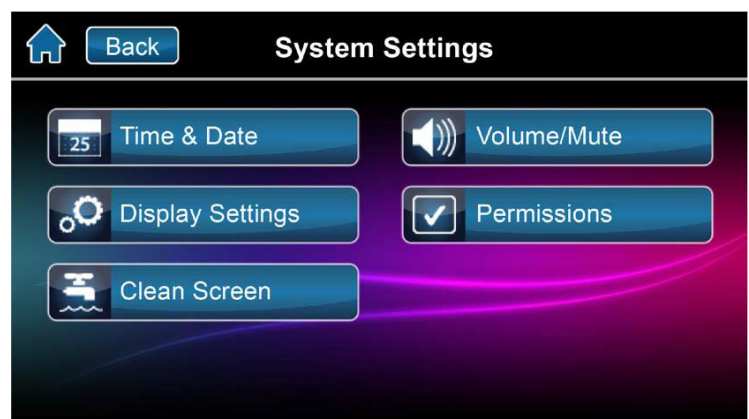

Mobile App Setup – Paradox Insight Gold

Insite Gold App

- ▶ Reliable 24/7 connection
- ▶ Site supervision and push if lost
- ▶ Bridge for Video streaming and push notifications
- ▶ No port forwarding, IP programming/ configuration or UPNP required
- ▶ Encrypted communication – no data kept on server
- ▶ Simple account creation with email and Site Panel serial number
- ▶ Bridge to connect Paradox systems to Cellular or IP devices
- ▶ Auto-connect to PCS cellular devices, IP150, and IP cameras





Creating New User App Account

To Create a new account please contact us for information and guidance.

For an existing account to set up with a new device, please follow the following steps:

1. Open Insight Gold App
2. Press the + Sign on the top Left of the screen
3. Insert the site Details:
4. Site Name: _____
5. Site ID: _____
6. Swan Email _____

(your e-mail used to setup the site originally)

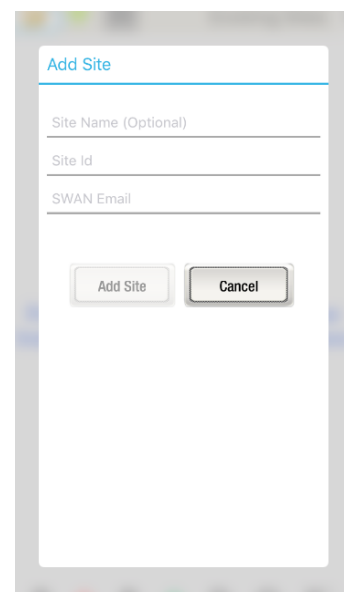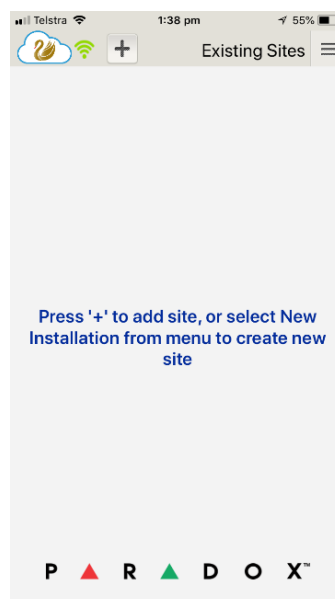

Security system operation Via the App:

Arm/Disarm

- Select the Security option on the bottom of the Screen
- Press the preferred option on the top part of the screen: Disarm/Stay/Arm
- The Security Page provides general information about the system such as alarms, faults and zone status.
- You will not need to type in your code as the app has already logged you in at the start via a pin or facial recognition.



Doors Access Control

- Select the “Access” Option on the bottom of the Screen
- Select the “Unlock” option of the preferred Door to open the door – the door will be locked automatically after a set delay.
- Select the “Open” option to keep the door unlocked until pressed to lock again.

